


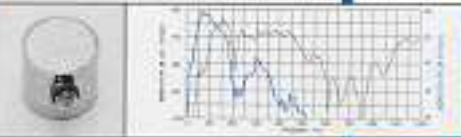



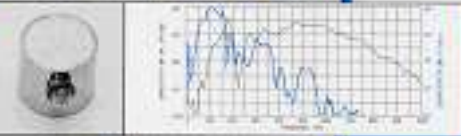

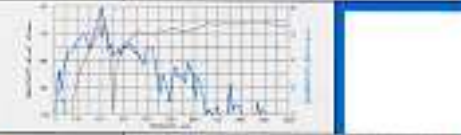

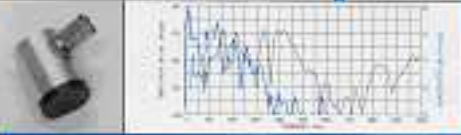



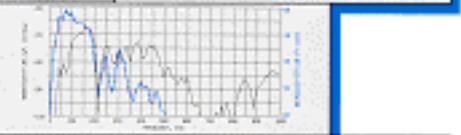

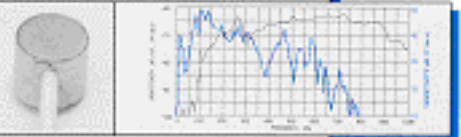

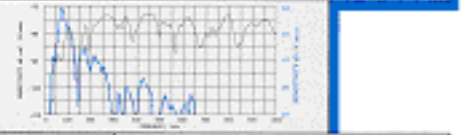

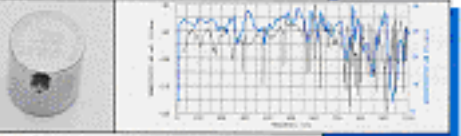
AE センサー : Acoustic Emission Sensors

	形 式	寸 法 直径×高さ(mm)	周波数帯域 (kHz)	共振周波数 (kHz)	使用温度 ()
一 般 用	A3	16×23	30~55	35	-65~177
	R6	19×22	35~100	90	-65~177
	R15	18×17	50~100	150	-65~177
	R30	18×17	100~400	350	-65~177
	R50	18×17	100~700	500	-65~177
	R80	18×17	200~1000	800	-65~177
	S140B	20×28	20~175	160	-54~121
	D140B	20×28	20~250	235	-54~121
	S9204	23×15	50~200	150	-54~121
	D9204	19×22	50~150	125	-65~177
広帯域型	WD	18×17	100~1000	650	-65~177
	UT - 1000	18×17	60~1000	450	-65~177
	S9208	25×25	20~1000	500	-54~121
	D9202B	18×17	400~1000	450	-65~125
	D9203B	18×17	150~1000	500	-65~125
高温用	S9215	20×20	50~650	500	-200~540
	PYRO	25×21	50~600	575	-200~540
特別仕様	D9240	38×38	250~625	80	-65~121
	R2	29×67	15~25	20	-45~110
	R2I	29×67	15~25	20	-45~85
	RSWD	25 ローラ	200~1000	525	-45~110
	R15IU	29×40	50~200	150	-45~85
小 型	MICRO 30	10×12	100~600	225	-65~177
	MICRO 80	10×12	175~1000	325	-65~177
	MICRO 100	10×12	200~1000	325	-65~177
	NANO 30	8×8	125~750	300	-65~177
	PICO	5×4	200~750	500	-65~177
	S9220	10×4	10~1000	925	-54~121
	S9223	9×12	25~100	32	-54~121
	S9225	3.6×2.4	250~1000	600	-54~121
プリアンプ内蔵型	I15I	20×22	70~2000	155	-45~85
	I30I	20×22	100~400	375	-45~85
	I50I	20×22	150~550	475	-45~85
	R6I	29×40	40~100	90	-45~85
	R15I	29×31	70~200	153	-45~85
	R30I	29×31	125~450	350	-45~85
	R50I	29×30	300~550	500	-45~85
	WDI	29×30	100~1000	500	-45~85

GENERAL PURPOSE SENSORS

R6	A3		
R15			
R30			
R50			
R80			
S140B			

WIDE BAND SENSORS

S9204	D140B		
UT-1000	WD		
S9208			
D9202B			
D9203B		